

Reference	Diamètre ADSS ADSS diameter (mm)	Longueur Length (mm)
PSVD 083	8,31 - 11,69	1295
PSVD 117	11,70 - 14,31	1360
PSVD 143	14,32 - 19,30	1570

1. Positionner les spires d'accrochage de la spirale antivibratoire côté ancrage ou support (Fig. 1).

1. Place spiral vibration damper with gripping section toward the dead-end or support point as shown (Fig. 1).

2. Enrouler les spires amortisseuses sur le câble et sur toute la longueur (Fig. 2).

2. Wind up damping section around the cable on total length (Fig. 2)



3. Faire glisser la spirale amortisseuse de façon que l'extrémité des spires d'accrochage soit située approximativement d'une largeur de main de l'extrémité (d'ancrage, d'armor-rod, ...etc) ou autre accessoire.

3. Slide out damper onto the cable until the end of the gripping section is approximately one hand's width from the end of dead-end, armor-rod, ...etc, or other fitting.



Finir le montage en enroulant les spires d'accrochage sur le câble.

Complete application by winding up gripping section around the cable.



4. Montage final

4. Completed assembly

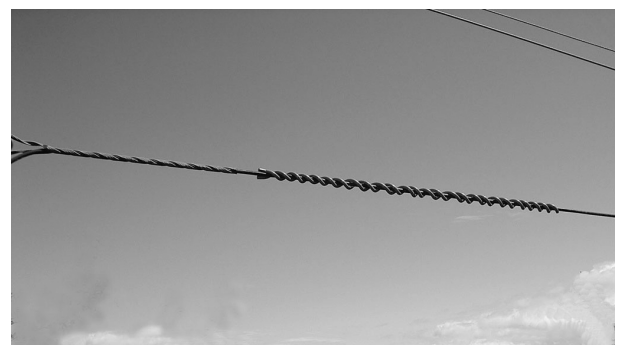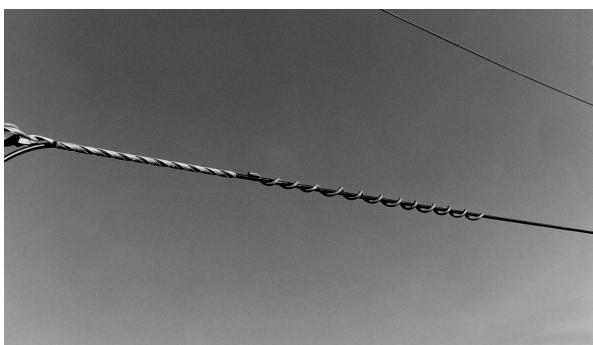

Nota : Documentation et photos non contractuelles.
No contractual documentation. Photos for illustration only.

