



TRAVERSES  
CROSSARMS

TRAV


TRAV 505

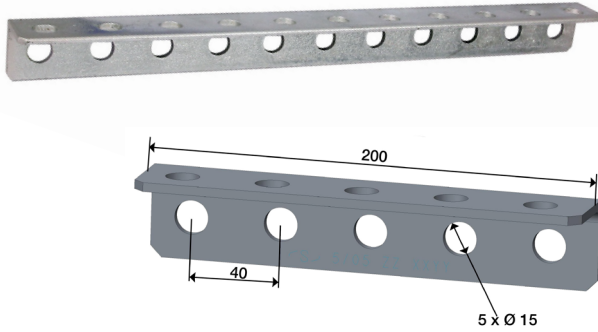


TRAV 514

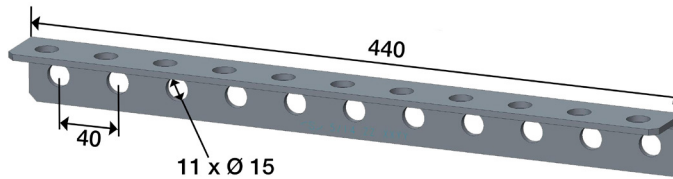

TRAV 515

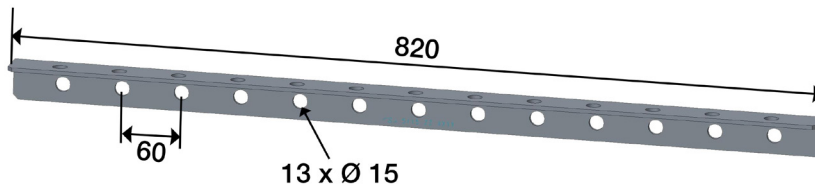

TRAV 519

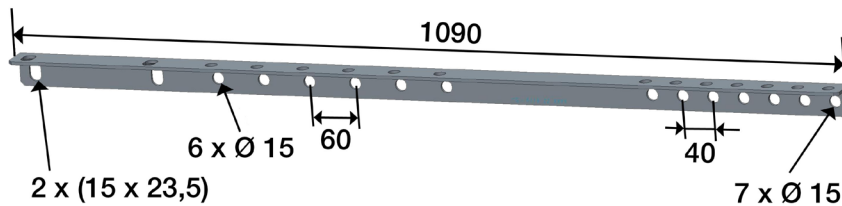

Code	Reference	L (mm)	Nbre trous Nber holes Ø 15 mm	Résistance mini traction verticale ou horizontale Mini vertical or horizontal tensile strength (daN)	Fixation Fixing	Matière Material	Poids Weight (kg)	Cond <sup>t</sup> Packing
P10088008	TRAV 505	200	5	100	SEM 516 SEM PB CASHT	Acier galvanisé à chaud Hot dip galvanized steel	0,422	1
P977043001	TRAV 514	440	11	100	SEM 516 SEM PB CASHT SEMEQ 539		0,920	1
P977043002	TRAV 515	820	13	100	SEM 516 SEM PB SEMEQ 539		1,850	1
P977043003	TRAV 519	1090	15	100	SEMEQ 539 SEM PB		2,440	1

NOTA : Les caractéristiques techniques sont données à titre indicatif et peuvent être modifiées sans préavis. Photos non contractuelles.  
The characteristics are given for information and can be changed without prior notice. Photos for illustration only.